
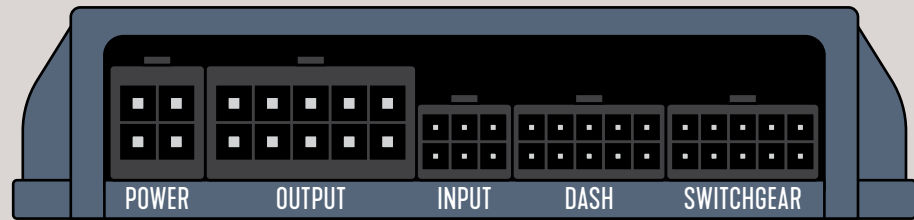


R3.5 Control Hub


STANDARD SWITCH

FEATURES

- Complete electrical control hub
- Complete color-coded wiring harness
- Atmel 8-bit AVR® RISC-based microcontroller
- Trench type MOSFET powered
- Solid State design for water-proof and shock-proof operation
- 4 layer PCB design utilizing SMD components
- PTC smart fuse protection with auto reset
- Build in master system fuse
- Enhanced engine power protection with quick blow fuse
- No start ignition coil time-out power off
- Engine run monitoring
- AC/DC voltage runaway engine shutdown protection
- Charging system monitoring with fault audible notification
- Selectable charge-light output functions
- On board high power starter relay
- Starter motor safety lock out with anti-grind
- Starter motor max crank time out
- Optimized for LED lighting
- Brake light flash pre-warning
- Automatic brake light HOLD
- Single wire PWM taillight output
- Onboard digital flasher
- Sequential/self flashing signal light capable
- Signal light time out auto off
- "PARK" position hazard light feature
- DRL/Halo/Front Marker light output with TYPE 2 switchback
- Master light control
- Soft start headlight ON
- Brake fluid sensor/Auxiliary sensor input/output
- Enhanced smart dash gauge outputs
- 1 year replacement warranty & tech service

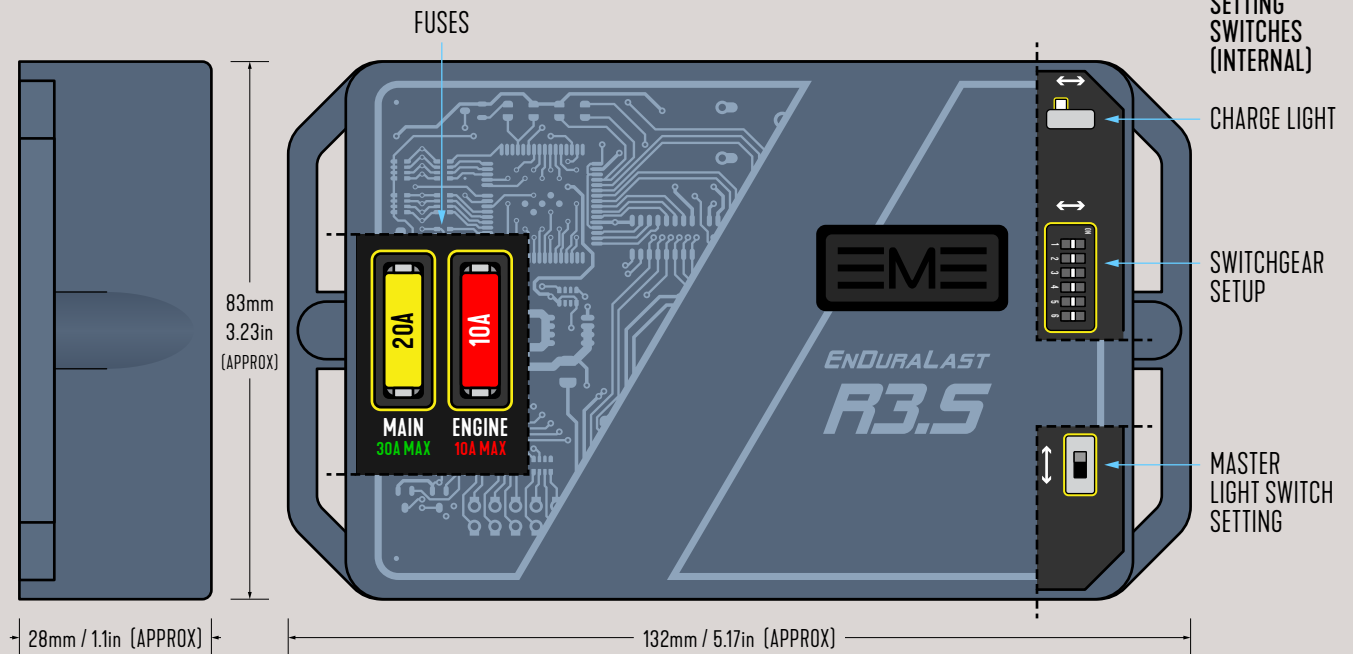

INCLUDED HARNESSSES:

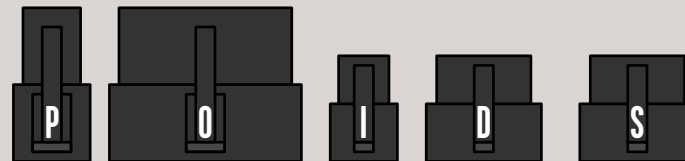


Designed for OEM type of switchgears




R3.5

Pinouts

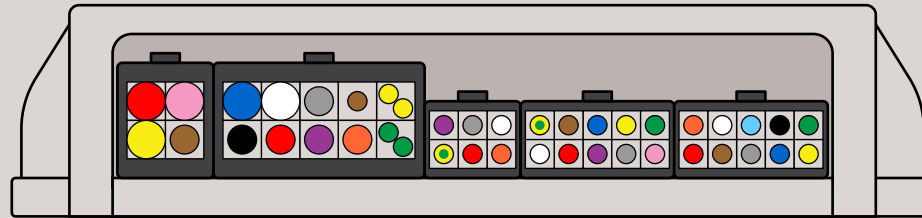

POWER OUTPUT INPUT DASH SWITCH

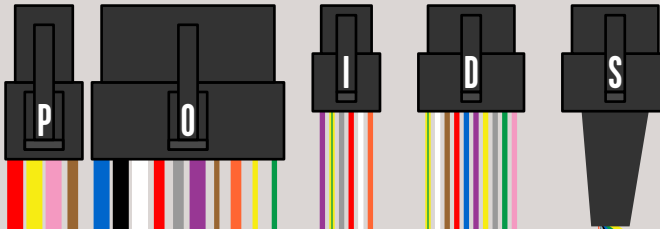

POWER

KO+	16AWG, 1.0m	(+)	KEY SWITCH POWER COMMON
B+	16AWG, 1.0m	(+)	BATTERY POWER IN
KI+	16AWG, 1.0m	(+)	KEY SWITCH POWER IN
P+	18AWG, 1.0m	(+)	HAZARD LIGHT SWITCH IN

OUTPUT

HI	16AWG, 1.0m	(+)	HEADLIGHT HIGH BEAM
GND	18AWG, 0.25m	(-)	CHASSIS GROUND
LO	16AWG, 1.0m	(+)	HEADLIGHT LOW BEAM
ENGINE	18AWG, 1.0m	(+)	ENGINE IGNITION POWER
HORN	18AWG, 1.0m	(+)	HORN
STARTER	18AWG, 1.0m	(+)	STARTER MOTOR
FRONT LIGHT	22AWG, 1.0m	(+)	DRL / HALO / FRONT MARKER
TAILLIGHT	18AWG, 1.0m	(+)	TAILLIGHT
LEFT TURN	(2) 22AWG, 1.0m	(+)	LEFT TURN SIGNAL LIGHTS (FRONT & REAR)
RIGHT TURN	(2) 22AWG, 1.0m	(+)	RIGHT TURN SIGNAL LIGHTS (FRONT & REAR)

INPUT

OIL	22AWG, 1.0m	(-)	OIL SWITCH
RUN SENSE	22AWG, 1.0m	(~)	IGNITION COIL TRIGGER
NEUTRAL	22AWG, 1.0m	(-)	NEUTRAL SWITCH
AUX	22AWG, 1.0m	(~)	AUX SENSOR / SWITCH / INPUT
CHARGE	22AWG, 1.0m	(-)	DIODE BOARD CHARGING WIRE
BRAKE	(2) 22AWG, 1.0m	(-)	BRAKE SWITCHES (FRONT & REAR)

HANDLEBAR SWITCH

LEFT TURN	22AWG, 1.0m	(-)	LEFT TURN SWITCH
RIGHT TURN	22AWG, 1.0m	(-)	RIGHT TURN SWITCH
HI	22AWG, 1.0m	(-)	HIGH BEAM SWITCH
ENGINE	22AWG, 1.0m	(-)	ENGINE POWER SWITCH
HORN	22AWG, 1.0m	(-)	HORN SWITCH
START	22AWG, 1.0m	(-)	START SWITCH
TAILLIGHT	22AWG, 1.0m	(-)	TAILLIGHT SWITCH
HEADLIGHT	22AWG, 1.0m	(-)	HEADLIGHT SWITCH
CLUTCH	22AWG, 1.0m	(-)	CLUTCH SWITCH
CANCEL	22AWG, 1.0m	(-)	CANCEL SWITCH

DASH

K+	22AWG, 1.0m	(+)	GAUGE POWER
RIGHT TURN	22AWG, 1.0m	(+)	RIGHT TURN INDICATOR
NEUTRAL	22AWG, 1.0m	(-)	NEUTRAL INDICATOR
LEFT TURN	22AWG, 1.0m	(+)	LEFT TURN INDICATOR
OIL	22AWG, 1.0m	(-)	OIL INDICATOR
HI	22AWG, 1.0m	(+)	HIGH BEAM INDICATOR
AUX	22AWG, 1.0m	(~)	AUX OUTPUT
BACKLIGHT	22AWG, 1.0m	(+)	BACKLIGHT POWER
CHARGELIGHT	22AWG, 1.0m	(-)	CHARGE LIGHT
TACH	22AWG, 1.0m	(~)	TACH PULSE